



Navansh International

Define By Excellence

BONDING INNOVATION. BUILDING TOMORROW.

High Performance Adhesives, Sealants
& Industrial Solutions for a Stronger,
Smarter & Sustainable Future.

CATALOGUE
2026



PUR SOLUTIONS



EVA HOT MELT



SEALANTS



TRUSTED
PARTNERSHIP



PREMIUM
QUALITY



INNOVATIVE
SOLUTIONS



GLOBAL
PRESENCE



www.navanshinternational.in

WHO WE ARE

NI
DEFINED BY
EXCELLENCE

INDIA BASED SOURCING AND DISTRIBUTING COMPANY

Sourcing quality products globally and delivering value to industries across India and beyond.



ADHESIVES

High performance adhesive solutions for diverse industrial applications.



SEALANTS

Reliable sealant solutions designed for durability and long-lasting performance.



INDUSTRIAL CHEMICALS

A wide range of industrial chemicals meeting global quality standards.

OUR VALUES



GROWTH

Building sustainable growth through innovation and excellence.



TEAMWORK

Collaborating with partners to achieve shared success.



INNOVATION

Embracing new ideas to create better solutions.



INTEGRITY

Upholding the highest standards of honesty and transparency.



CUSTOMER FOCUS

Committed to understanding and delivering customer value.



QUALITY ASSURED

Partnering with trusted manufacturers worldwide.



ON-TIME DELIVERY

Efficient logistics ensuring timely supply.



STRONG PARTNERSHIPS

Long-term relationships built on trust.



PAN INDIA NETWORK

Serving industries across India and beyond.

OUR PARTNER



旭川化学
XUCHUAN CHEMICAL

Manufacturer of PUR Hot Melt Adhesive

ABOUT OUR PARTNER

Xuchuan Chemical Co., Ltd. is a leading professional manufacturer of polyurethane materials with advanced technology, strong production capacity and global market presence.

Their commitment to innovation, quality and sustainability makes them a trusted partner for high performance bonding solutions.



1.2 billion USD
in 2023



Overseas business in
40 countries



TOP 2 Domestic
market share



920000 tons
total capacity



1200+
employees



4 production sites
1 Under construction

PRODUCTION SITES



XUCHUAN CHEMICAL
(SUZHOU) CO.,LTD (Western District)



XUCHUAN CHEMICAL
(SUZHOU) CO.,LTD (Eastern District)



ZHEJIANG XUCHUAN CHEMICAL CO.,LTD



XUCHUAN CHEMICAL (KUNSHAN)
CO.,LTD

PRODUCT RANGE

NI

DEFINED BY
EXCELLENCE

HIGH PERFORMANCE BONDING SOLUTION FOR MODERN APPLICATION

01

- PUR HOT MELT ADHESIVE
FOR FLAT LAMINATION



02

- PUR HOT MELT ADHESIVE
FOR PROFILE WRAPPING



03

- PUR HOT MELT ADHESIVE
FOR EDGE BANDING



04

- EVA HOT MELT ADHESIVE
FOR EDGE BANDING



05

- SILICON SEALANTS



06

- NAIL FREE ADHESIVE



07

- ACRYLIC SEALANTS



08

- PU SEALANTS



PREMIUM QUALITY



WIDE APPLICATION



INNOVATIVE SOLUTIONS



SUSTAINABLE



FLAT LAMINATION

INI DEFINED BY
EXCELLENCE

Reactive Polyurethane Hot Melt Adhesives for
Woodworking Flat Lamination – High Performance
Solutions for Premium Bonding.



APPLICATIONS

- MDF / HMR Boards
- Plywood & Particle Board Panels
- WPC Boards & Decorative Panels
- PVC Panels, Foam Boards, Kitchen Cabinet
- Wardrobe Panels & Furniture Panels
- ACP Decorative Panels
- Door Panels
- Wall Panels & Cladding
- High Gloss Panels



SUITABLE DECORATIVE FILMS:

PVC Film | PET Film
PP Film | High Gloss Film
Decorative Foils



FLAT LAMINATION ADHESIVES

PARAMETERS	XCUR-6011HL-ST (Thin Lamination)	XCUR-6068HL-S (Standard Lamination)	XCUR-6090HL-SS (High Open Time)
Appearance	Transparent	White Solid	Yellow Solid
Viscosity (cps/120°C or 140°C)	10000 – 14000 @ 120°C	10000 – 13000 @ 120°C	9000 – 18000 @ 140°C
Solid Content	100%	100%	100%
Density (Open)	About 1.06 g/cm ³	About 1.06 g/cm ³	About 1.06 g/cm ³
Open Time	2 – 3 min	3 min	20 min
Glue Coating Amount	40 – 60 g/m ²	30 – 100 g/m ²	30 – 100 g/m ²



HIGH
PERFORMANCE



STRONG
ADHESION



PREMIUM
FINISH



WIDE RANGE OF
APPLICATIONS



PROFILE WRAPPING

PUR HOT MELT ADHESIVE FOR PROFILE WRAPPING

PUR Hot Melt Adhesives are reactive polyurethane based adhesives specifically designed for profile wrapping applications.

They provide excellent adhesion to PVC, PET, CPL, veneer and other decorative films, ensuring strong bonding, outstanding durability and resistance to temperature and moisture.

Our PUR adhesives ensure smooth processing, high productivity and premium finish for wrapped profiles.

APPLICATIONS :

- Door Frames & Door Profiles
- WPC/PVC Door Frames & Decorative Profiles
- Kitchen Cabinet Profiles
- Wardrobe & Furniture Profiles
- MDF / Wooden Mouldings
- Window & Architectural Profiles
- Wall Panel Decorative Profiles
- Aluminium Decorative Profiles
- ACP and Composite Profiles



SUITABLE DECORATIVE FILMS:

PVC Film | PETG Film | CPL
Veneer | Decorative Foils



PROFILE WRAPPING ADHESIVES

PRODUCT	VISCOSITY (cps/120°C)	DENSITY (g/cm ³)	OPEN TIME	KEY FEATURES & APPLICATION
XCUR-9018HL	30000 – 65000	~1.10	20 – 40 Seconds	• High initial tack & fast setting • Excellent adhesion on PVC, veneer & various substrates • Ideal for profile wrapping applications
XCUR-6026HL-S	25000 – 32000	~1.06	1 – 2 Minutes	• Good flow & workability • Strong bonding on PVC, PET, metal, density board & more • Designed for profile wrapping lines



HIGH
PERFORMANCE



STRONG
ADHESION



PREMIUM
FINISH



WIDE RANGE OF
APPLICATIONS




EDGE BANDING

NI
DEFINED BY
EXCELLENCE

PUR HOT MAELT ADHESIVE FOR EDGE BANDING

PUR hot melt adhesives for edge banding are reactive polyurethane based adhesives designed for bonding PVC, PET, ABS and other edge bands to various wood based panels. They deliver high initial adhesion, fast positioning, excellent impact resistance, good fluidity and superior durability for a seamless and flawless finish.

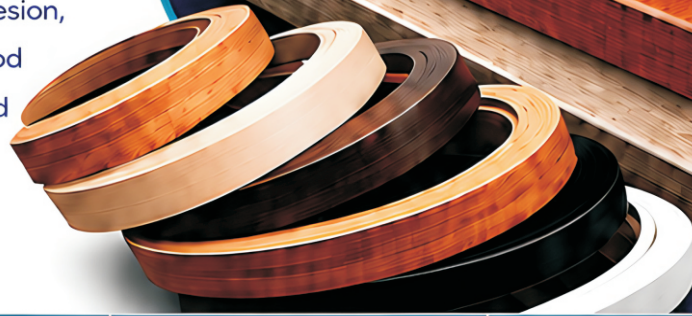

TECHNICAL DATA SHEET :

PARAMETER	XCUR-9073	XCUR-9074	XCUR-9075HL
1. Product Description			
Type	PUR hot melt adhesive for edge banding	PUR hot melt adhesive for edge banding	PUR hot melt adhesive for edge banding
Suitable For	PVC/PET/ABS on Aluminium honeycomb panel lamination , panel edge banding, furniture wrapping and composite bonding of metals,wood and decorative film.	PVC/PET/ABS on MDF,particle board,PVC foam board & others.	PVC/PET/ABS on MDF, Particle board,PVC foam board,composite density board.
Key Features	• High initial adhesion • Fast positioning • Good fluidity	• High initial adhesion • Fast positioning • Good fluidity	• High initial adhesion • Fast positioning • Good fluidity
2. Product Specifications			
Appearance	White solid	Natural solid	White solid
Viscosity	50000–70000 cps / 150°C	42000–60000 cps / 160°C	32000–50000 cps / 160°C
Solid Partial	100%	100%	100%
Density	About 1.06 g/cm ³	About 1.1 g/cm ³	About 1.06 g/cm ³
3.1 Operating Parameters			
Recommended Platen Temperature	140 ± 15°C (Summer) / 140 ± 15°C (Winter)	140 ± 15°C (Summer) / 140 ± 15°C (Winter)	140 ± 15°C (Summer) / 140 ± 15°C (Winter)
Recommended Hose Temperature	140 ± 15°C (Summer) / 140 ± 15°C (Winter)	140 ± 15°C (Summer) / 140 ± 15°C (Winter)	140 ± 15°C (Summer) / 140 ± 15°C (Winter)
Recommended Glue Gun Temperature	130 ± 20°C	130 ± 20°C	130 ± 20°C
Glue Coating Amount	About 100–150 g/m ² , depending on the thickness and roughness of the substrate.	About 100–150 g/m ² , depending on the thickness and roughness of the substrate.	About 100–150 g/m ² , depending on the thickness and roughness of the substrate.
3.2 Base Material Requirements			
PVC/PET/ABS Edge Banding	Smooth and uniform thickness.	Smooth and uniform thickness.	Smooth and uniform thickness.
Particleboard, MDF, Composite Board	Smooth cut.	Smooth cut.	Smooth cut.
Bonding Surface	Surface dust and oil, etc. must be removed.	Surface dust and oil, etc. must be removed.	Surface dust and oil, etc. must be removed.



**STRONG
ADHESION**



**PREMIUM
FINISH**



**HIGH DURABILITY
& IMPACT RESISTANCE**



**WIDE RANGE OF
APPLICATIONS**

EVA HOT MELT ADHESIVES

High Performance Edge Banding Solutions



EDGE
BANDING



STRONG
BONDING



HIGH
EFFICIENCY



RELIABLE &
DURABLE

ABOUT EVA HOT MELT ADHESIVES

- ✓ EVA hot melt adhesives provide excellent initial tack and strong bond strength for edge banding applications.
- ✓ Designed for a wide range of materials including PVC, ABS, Veneer, MDF, Particle Board and Plywood.
- ✓ Offer high heat resistance, solvent resistance and consistent performance on manual and automatic edge banding machines.
- ✓ Ensure smooth glue line, clean processing and improved productivity.

PRODUCT RANGE – EVA HOT MELT ADHESIVES

PARAMETER	GRADE			
	SH322	SH3601	88050	HM305
Application	Manual Edge Banding	Automatic Edge Banding	High Speed Automatic Edge Banding	Automatic Edge Banding
Suitable For	Wood chips, HPL, PVC, Particle Board, MDF etc.	PVC, ABS (0.4 – 3mm), Veneer (0.4 – 0.6mm), Particle Board, MDF, Plywood	All kinds of edge banding materials, Wooden doors, MDF, Particle Board, Plywood	PVC, ABS (0.4 – 3mm), Veneer (0.4 – 0.6mm), Particle Board, MDF, Plywood
Appearance	Granule	Granule	Granule	Granule
Colour	Yellow	Natural (Primary Colour)	White	White
Viscosity @180°C	8,000 ± 2,000 cps	80,000 ± 20,000 mPa·s	110,000 ± 20,000 cps	100,000 ± 20,000 mPa·s
Viscosity @200°C	–	50,000 ± 10,000 mPa·s	65,000 ± 10,000 cps	60,000 ± 10,000 mPa·s
Softening Point	102 ±5°C	103 ±5°C	110 ±5°C	103 ±5°C
Density (g/cm³)	–	–	1.10 ± 0.10	1.30 ± 0.10
Working Temperature (At Roller)	150 – 180°C	180 – 190°C	170 – 200°C	180 – 190°C
Glue Spread	100 – 250 g/m²	230 – 280 g/m²	180 – 250 g/m²	230 – 280 g/m²
Feed / Conveyor Speed	10 – 20 m/min	15 – 28 m/min	15 – 40 m/min	15 – 28 m/min
Pressing Pressure	3 – 5 kg/cm²	–	3 – 5 kg/cm²	–
Storage Condition	Store in sealed original package in a clean, cool & dry place at 5 – 35°C.			
Storage Life	24 Months	24 Months	24 Months	24 Months
Pack Size	25 kg	25 kg	25 kg	25 kg

*Note: All parameters depend on the material to be glued and specific process conditions.

IDEAL FOR APPLICATIONS



Modular Furniture
Manufacturers



Kitchen Cabinet
Production



Office
Furniture



Doors & Panel
Manufacturing



MDF & Particle
Board Processing



Plywood
Industry



TRUSTED
PARTNERSHIP



PREMIUM
QUALITY



INNOVATIVE
SOLUTIONS



GLOBAL
PRESENCE



www.navanshinternational.in

SEALANT SOLUTION — AND ADHESIVES —

LEVICO™

— APPLY TODAY | TRUST TOMORROW —



ABOUT LEVICO

LEVICO is a trusted brand by Navansh International, delivering premium-quality adhesives and sealants for industrial and construction applications.

Our products are engineered for superior bonding strength, durability, and consistent performance.

With a focus on innovation and quality, LEVICO offers reliable solutions that meet international standards.

We are committed to helping manufacturers and professionals achieve efficient, long-lasting results.

LEVICO –
APPLY TODAY | TRUST TOMORROW



LVC-206

APPLICATIONS

- ✓ Stone
- ✓ Metals
- ✓ ACP
- ✓ Home Decoration Materials
- ✓ Brick Application
- ✓ PVC/WPC Wall Panels
- ✓ Stainless Steel Fixing
- ✓ Modern Décor Installation
- ✓ Wood to Wood Assembly
- ✓ Lumber and Treated Lumber
- ✓ Fiberglass Shower Enclosures
- ✓ Metal, Brick, Plaster, Masonry, Concrete, Drywall, Ceramic, Plywood, Particleboard



STRONG
BONDING



HIGH
DURABILITY



VERSATILE
APPLICATION



PROFESSIONAL
GRADE



HIGH STRENGTH
ADHESION



WEATHER & WATER
RESISTANT



INTERIOR & EXTERIOR
USE



PROFESSIONAL
RESULTS



ADVANCED BONDING. PERFECT PROTECTION.

High-performance sealants and adhesives designed for crystal clear transparency, durability and superior bonding.

MS KRYSTAL

— CRYSTAL CLEAR
ADHESIVE —

APPLICATIONS

- Transparent glass bonding
- Glass brick installation
- Plastic object bonding
- Window and door frame installation
- Internal partition wall bonding
- Shower enclosure and shower booth sealing
- Glass partition wall installation
- Filling gaps between skirting boards and floors
- Crystal stone and brick bonding
- Facade sealing and bonding
- Sealing expansion joints
- Decorative item installation
- Filling cracks and crevices
- Internal and external gap sealing
- General construction and interior bonding applications



POLYURETHANE AUTOMOTIVE WINDSHIELD SEALANT

APPLICATIONS

- Windshield Installation
- Front & Rear Glass Bonding
- Side Window Sealing
- Automotive Glass Replacement
- Vehicle Glass Repair
- Automotive Body Glass Sealing
- Suitable for All Types of Vehicles



STRONG
ADHESION



WATER & WEATHER
RESISTANT



FAST DRYING
FORMULA



INTERIOR & EXTERIOR
APPLICATION



PROFESSIONAL
GRADE QUALITY



— APPLY TODAY | TRUST TOMORROW —

PROFESSIONAL SEALING BUILT FOR PERFORMANCE


High-performance sealants engineered for durability, flexibility, and long-lasting protection in every application.

ACRYLIC SEALANT

LVC-104

APPLICATIONS

-  Door & Window Frames
-  Indoor Skirting
-  Caulking of Furniture
-  Sealing window and door frames
-  Filling gaps around interior skirting boards
-  Sealing cracks in walls and woodwork
-  Filling joints in parquet and laminate flooring
-  Sealing around plasterboard and architraves
-  Sealing staircases and interior trim
-  General interior gap filling and finishing

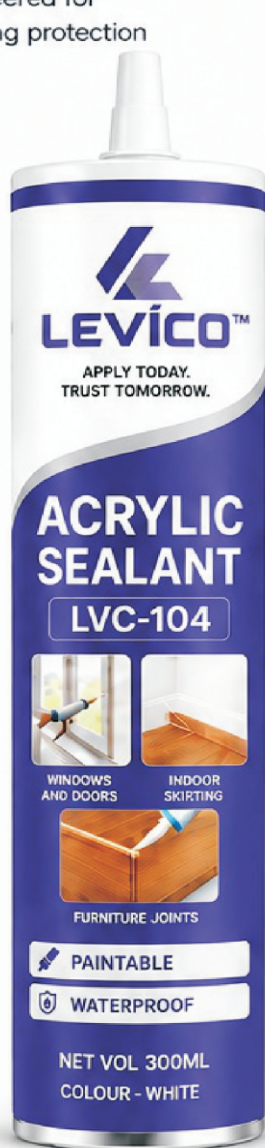

WN NEUTRAL WEATHERPROOF SILICONE SEALANT

LVC-789

APPLICATIONS

-  Glass & glazing joints
-  Windows and doors
-  Curtain wall systems
-  Aluminum and metal panels
-  Concrete and marble sealing
-  Skylights and sunroofs
-  Construction joints
-  Architectural weatherproofing
-  Industrial sealing applications



PAINTABLE

Can be painted after curing for a seamless finish.



WATERPROOF

Provides excellent waterproof sealing and protection.



WEATHER RESISTANT

Resists UV, rain and extreme weather conditions.



STRONG ADHESION

Excellent adhesion to a wide range of surfaces.



SHRINKAGE FREE

No cracking or shrinking for a durable seal.





— APPLY TODAY | TRUST TOMORROW —

SMART SOLUTIONS. STRONGER BONDS.

High-performance sealants and foams
engineered for every application.
Reliable. Durable. Trusted.

MULTIPURPOSE PU FOAM

LVC-101

APPLICATIONS

-  Door & Window Installation
-  Window Frame Sealing
-  Pipe Installation & Penetration
-  Wall Cavity Insulation
-  Roof Gap Filling
-  Roof Tile Fixing
-  Crack Filling & Sealing
-  Thermal Insulation
-  Construction Joint Sealing
-  Renovation & Repair Works



GP ACETIC FAST DRY SILICONE SEALANT

LVC-110

APPLICATIONS

-  Glass Panels
-  Fish Tanks
-  Structural Glazing
-  Transparent Glass Assemblies
-  Bathtubs
-  Shower Areas
-  Sinks



STRONG
ADHESION



WATER & WEATHER
RESISTANT



FAST DRYING
FORMULA



INTERIOR & EXTERIOR
APPLICATION




PROFESSIONAL
GRADE QUALITY




NAVANSH INTERNATIONAL LLP

— TRUST • GROWTH • SUCCESS —


Industries We Serve



Wall Panel & Interior
Solution Providers



Modular Kitchen, Wardrobe,
Furniture Manufacturers




Aluminium Profile
Processors



ACP / Composite
Panel Processors



WPC Profile & Board
Manufacturers




Panel Processing
Units



Interior Fit-Out & Architectural
Solution Providers



PVC Board
Processors



Furniture Profile
Manufacturers



Office Furniture
Manufacturers



Door & Door Frame
Manufacturers



Decorative Moulding
Architectural Profile
Manufacturers

Let's Build Together.

Get in touch for product guidance,
samples, or bulk pricing.



CALL US

92177 20102
92177 30102



EMAIL US

info@navanshinternational.in



WEBSITE

www.navanshinternational.in



OUR SOCIAL HANDLES



REGISTERED ADDRESS



B-699, First Floor, Sector-1,
Rohini, New Delhi-110085



PREMIUM QUALITY
PRODUCTS



INDUSTRY EXPERTISE
YOU CAN TRUST



CUSTOMER-CENTRIC
APPROACH



COMMITTED TO
YOUR GROWTH

To Become Our Dealer or Distributor - Contact us